

2022

Abrites Diagnostics for Chrysler, Dodge, Jeep



# ABRITAES DIAGNOSTICS FOR CHRYSLER, DODGE, JEEP

**User manual**  
version 3.0



## Important notes

---

The Abrites software and hardware products are developed, designed and manufactured by Abrites Ltd. During the production process we comply to all safety and quality regulations and standards, aiming at highest production quality. The Abrites hardware and software products are designed to build a coherent ecosystem, which effectively solves a wide range of vehicle-related tasks, such as:

- Diagnostic scanning;
- Key programming;
- Module replacement,
- ECU programming;
- Configuration and coding.

All software and hardware products by Abrites Ltd. are copyrighted. Permission is granted to copy Abrites software files for your own back-up purposes only. Should you wish to copy this manual or parts of it, you are granted permission only in case it is used with Abrites products, has "Abrites Ltd." written on all copies, and is used for actions that comply to respective local law and regulations.

## Warranty

---

You, as a purchaser of Abrites hardware products, are entitled of a two-year warranty. If the hardware product you have purchased has been properly connected, and used according to its respective instructions, it should function correctly. In case the product does not function as expected, you are able to claim warranty within the stated terms. Abrites Ltd. is entitled to require evidence of the defect or malfunction, upon which the decision to repair or substitute the product shall be made.

There are certain conditions, upon which the warranty cannot be applied. The warranty shall not apply to damages and defects caused by natural disaster, misuse, improper use, unusual use, negligence, failure to observe the instructions for use issued by Abrites, modifications of the device, repair works performed by unauthorized persons. For example, when the damage of the hardware has occurred due to incompatible electricity supply, mechanical or water damage, as well as fire, flood or thunder storm, the warranty does not apply.

Each warranty claim is inspected individually by our team and the decision is based upon thorough case consideration.

Read the full hardware warranty terms on our [website](#).

## Copyright information

---

### Copyright:

All material herein is Copyrighted ©2005-2021 Abrites, Ltd.  
Abrites software, hardware, and firmware are also copyrighted  
Users are given permission to copy any part of this manual provided that the copy is used with Abrites products and the "Copyright © Abrites, Ltd." statement remains on all copies  
"Abrites" as used in this manual synonymous with "Abrites, Ltd." And all it's affiliates  
The "Abrites" logo is a registered trademark of Abrites, Ltd.

### Notices:

The information contained in this document is subject to change without prior notice. Abrites shall not be held liable for technical/editorial errors, or omissions herein.  
Warranties for Abrites products and services are set forth in the express written warranty statements accompanying the product. Nothing herein should be construed as constituting any additional warranty.  
Abrites assumes no responsibility for any damage resulting from the use, misuse, or negligent use of the hardware or any software application.

## Safety information

---

The Abrites products are to be used by trained and experienced users in diagnostics and reprogramming of vehicles and equipment. The user is assumed to have a good understanding of vehicle electronic systems, as well as potential hazards while working around vehicles. There are numerous safety situations that cannot be foreseen, thus we recommend that the user read and follow all safety messages in the available manual, on all equipment they use, including vehicle manuals, as well as internal shop documents and operating procedures.

Some important points:

Block all wheels of the vehicle when testing. Be cautious when working around electricity.

Do not ignore the risk of shock from vehicle and building-level voltages.

Do not smoke, or allow sparks/flame near any part of the vehicle fuel system or batteries.

Always work in an adequately ventilated area, vehicle exhaust fumes should be directed towards the exit of the shop.

Do not use this product where fuel, fuel vapours, or other combustibles could ignite.

In case any technical difficulties occur, please contact the  
**Abrites Support Team by email at [support@abrites.com](mailto:support@abrites.com).**

# Table of contents

1. Introduction
2. Abrites diagnostics for Chrysler, Dodge, Jeep
  - 2.1 Standard diagnostic functionalities
  - 2.2. Special Functions
3. Cluster Calibration
4. Read/Update ConfData
5. Dump Tool
6. ECU Flasher Special Function
7. Key Learning - Immobilizer (SKIM)
  - 7.1. Programming Keys
  - 7.2 Erasing Keys
8. Mechanical Key Code Speical Function
9. Radio Code Special Function
10. Appendix
  - 10.1 Supported models for Calibration:

## List of revisions

---

Date	Chapter	Description	Revision
27.10.2010		First version of the document	1.0
06.06.2013		Update	2.0
10.11.2014		Update	2.1
01.10.2015		Update	2.2
15.08.2022	ALL	Update	3.0

# 1. Introduction

---

ABRITES Diagnostics for Chrysler, Dodge and Jeep is a professional diagnostic software.

In order to operate the software requires you to have an AVDI interface, a Windows based PC with Windows 7 or later version of the Windows OS. For optimal operation, it is always recommended to have the latest software version installed, active AMS, and a stable Internet connection.

The tool's purpose is to allow you to perform standard and advanced vehicle diagnostics, starting with module identification, reading and clearing of diagnostic trouble codes (DTCs) and live data monitoring, actuator testing, as well as advanced operations such as service functionality and more.


ABRITES Diagnostics for Chrysler, Dodge and Jeep currently supports K-Line, CAN-BUS and J1850 interface. Diagnostics is performed via the OBD-II connector.

## 2. Abrites diagnostics for Chrysler, Dodge, Jeep

The ABRITES Diagnostics for Chrysler, Dodge and Jeep consists of two parts:

Standard diagnostic functions like reading/clearing diagnostic trouble codes (DTC), scanning available devices in the vehicle, displaying actual values (measured parameters), performing actuator tests etc. Special functions like Key Learning, Mileage Recalibration, Engine Control Unit reading/writing and Dump Tool.

All devices, which are present in the car are listed in the main screen of the ABRITES Diagnostics for Chrysler, Dodge and Jeep. If you want to connect to a specific device, please double click on it or select it and press the "Connect" button. The "ABRITES Diagnostics for Chrysler, Dodge and Jeep will try to connect to the device. From this screen you have the option to select the vehicle in order to complete full vehicle scan, select the special function menu, or set some options and language.

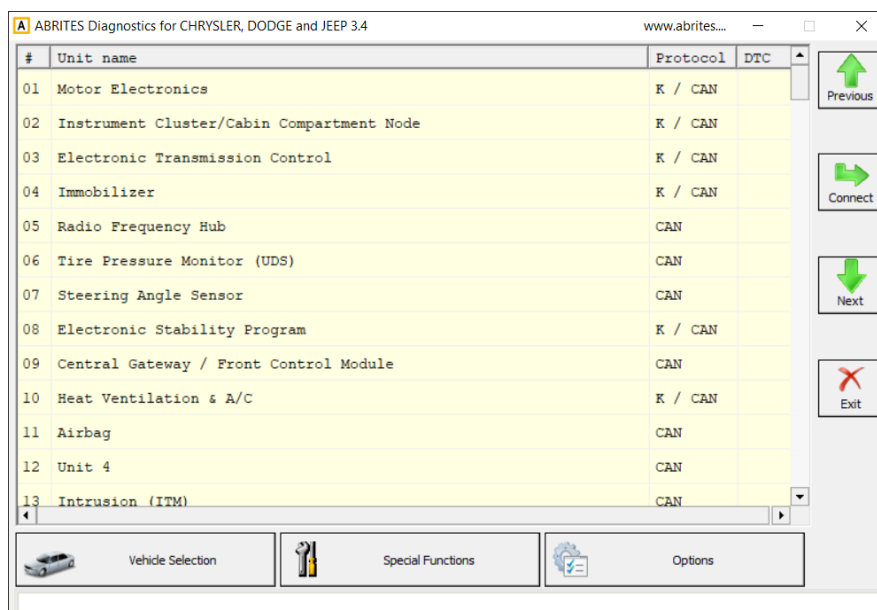


## 2.1 Standard diagnostic functionalities

In order to perform vehicle diagnostic scan you need to go into the “Vehicle Selection” tab, and choose the Brand, Model, and Engine type.

“Scan for Units” button would perform vehicle diagnostic, find all available modules and provide the DTCs.

“Clear DTCs” button would remove any temporary DTCs stored in the units, and the vehicle would remain with either no DTCs, or only with the DTCs that you need to take care of.


You also have the option to read/clear the DTCs of a single unit by choosing the unit from the list and double-clicking it, or pressing the “Connect” button. Once you open a unit, you will see a new window with the basic diagnostic options.

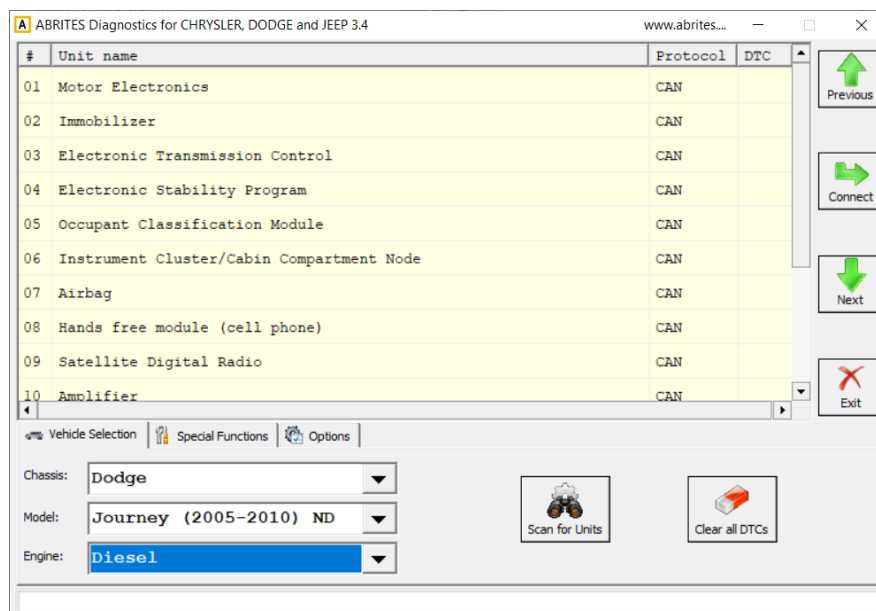



This is the main screen you see when you enter into a module, and provides the basic diagnostic functionalities. This is what you can do:



- Identification - gives the identification data of the module you have accessed
- Read DTCs - reads and displays the diagnostic trouble codes currently stored in the unit
- Custom Requests - functionality for development purposes
- Reset - would close any ongoing tasks
- Extended identification - provides more detailed identification data of the unit.
- Clear DTCs - clears the temporarily diagnostic trouble codes in the unit
- Security Access - performs security access of the unit
- Actuator Tests - lets you perform actuator tests
- Adaptation - lets you read/update the VIN of the unit by reading or updating its coding
- Custom Memory Read/Write - lets you read/update the memory data of a unit, save it to a file or upload a file in order to update.

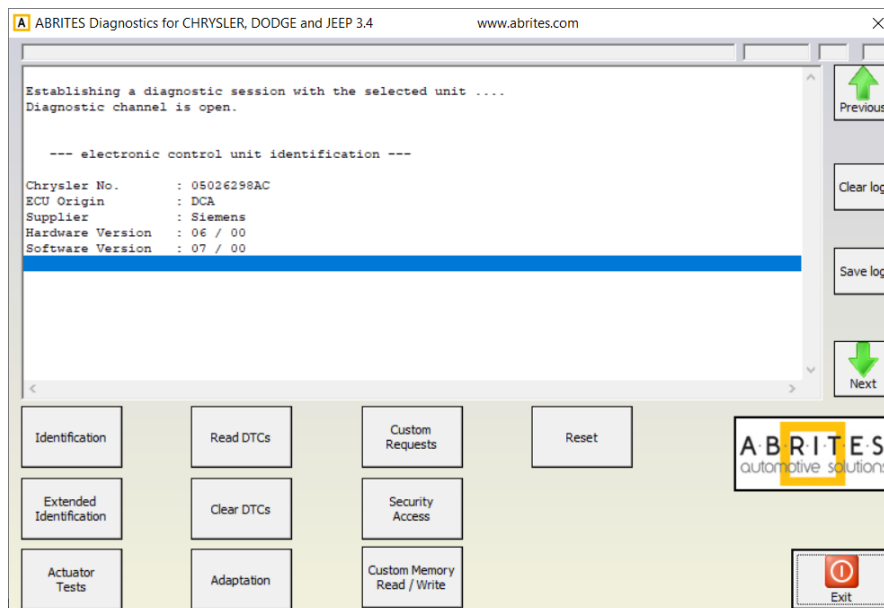

---

Below you can see screenshots from the “Adaptatons” menu, where you can read and update the VIN of a unit by reading or updating its coding.

The second screenshot displays the menu of the “Custom Requests” where you can send custom requests to the unit, making modifications, and you can save this as a file later. This is a functionality for advanced users

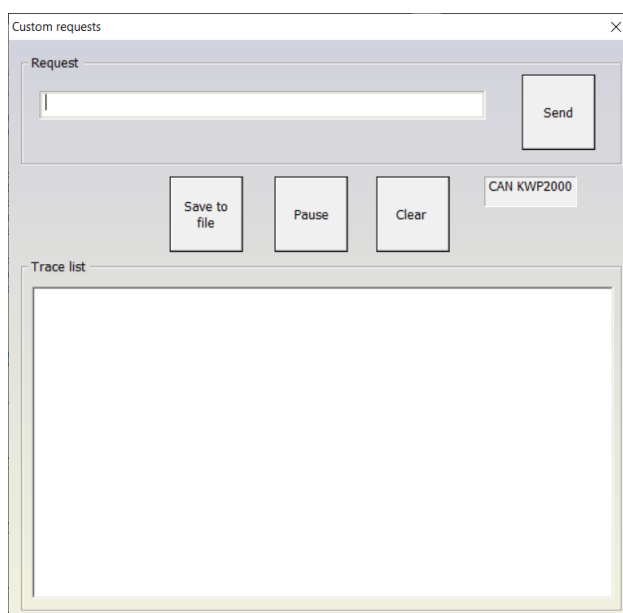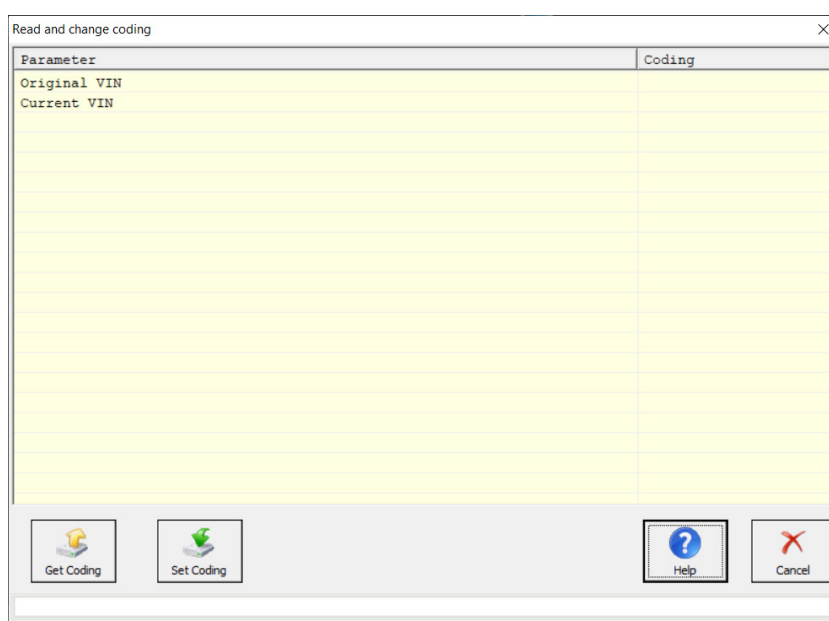


## 2.2. Special Functions

This option from the main screen opens the special function menu of the ABRITES Diagnostics for Chrysler, Dodge and Jeep. The required special function is opened by selecting it from the menu box and double-clicking on it.

The available special functions in ABRITES Diagnostics for Chrysler, Dodge and Jeep software are:

- Cluster Calibration,
- Read/Update ConfData,
- Dump Tool,
- ECU Flasher,
- Immobiliser (SKIM),
- Mechanical Key Codes,
- Radio Codes
- Sniffer (if available) is only dedicated to development purposes

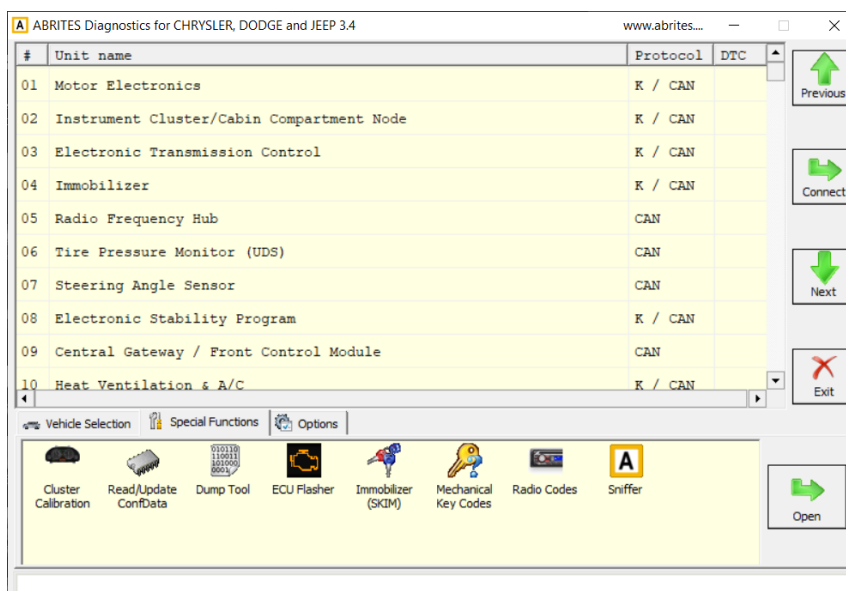

### 3. Cluster Calibration

Cluster Calibration procedure works for Dodge, Chrysler, and Jeep models by OBDII, the list is available in the software menu. Once you open the Cluster Calibration special function, you will see the list of supported models for this functionality sorted by brands. You need to choose the model you wish to work on, and click the green "OK" button in order to continue.

The software would bring a pop up message about the risks of this procedure.

Choose Vehicle Type

Main odometer in dashboard	Main odometer in dashboard	Main odometer in dashboard
<input type="radio"/> Dodge Avenger (2007 - )	<input type="radio"/> Chrysler PT Cruiser (-2000)	<input type="radio"/> SRI-3, SRI-4 (Engine Control Unit)
<input type="radio"/> Dodge Caliber (2007 - )	<input type="radio"/> Chrysler PT Cruiser (2001-)	<input type="radio"/> EDC 15C2 (Engine Control Unit)
<input type="radio"/> Dodge Charger (2007 - )	<input type="radio"/> Chrysler PT Cruiser Ver.1 (2006 - )	<input type="radio"/> EDC 16 (Engine Control Unit) - DPF Renew
<input type="radio"/> Dodge Caravan (2007 +)	<input type="radio"/> Chrysler PT Cruiser Ver.2 (2006 - )	<input type="radio"/> SRI (Engine Control Unit)
<input type="radio"/> Dodge Dakota (2004-2006)	<input type="radio"/> Chrysler Voyager (2007 - )	<input type="radio"/> Volkswagen Routan
<input type="radio"/> Dodge Durango (2004-2006)	<input type="radio"/> Chrysler Crossfire (1999) VDO dashboard	<input type="radio"/> Voyager (2000-2007)
<input type="radio"/> Dodge Durango (2007 - )	<input type="radio"/> Jeep Commander (2005 - )	
<input type="radio"/> Dodge Magnum	<input type="radio"/> Jeep Grand Cherokee (2005 - )	
<input type="radio"/> Dodge RAM (2001-2006)	<input type="radio"/> Jeep Cherokee, Jeep Liberty Ver.1 (2007 - 2010)	
<input type="radio"/> Dodge RAM (2006 - 2010)	<input type="radio"/> Jeep Cherokee, Jeep Liberty Ver.2 (2008 - 2010)	
<input type="radio"/> Dodge RAM (2010 - )	<input type="radio"/> Jeep Cherokee (2011 +)	
<input type="radio"/> Dodge Journey / JEEP Laredo	<input type="radio"/> Jeep Compass	
<input type="radio"/> Dodge Nitro	<input type="radio"/> Jeep Patriot	
<input type="radio"/> Chrysler Aspen (2007)	<input type="radio"/> Jeep Wrangler (2007 - )	
<input type="radio"/> Chrysler Pacifica (2007)	<input type="radio"/> Jeep Cherokee / Jeep Liberty (2002-2006)	
<input type="radio"/> Chrysler Town and Country (2007 - )	<input checked="" type="radio"/> Jeep Grand Cherokee (2002-2004)	
<input type="radio"/> Chrysler 300M (1999-2004)	<input type="radio"/> Neon ( - 2002)	
<input type="radio"/> Chrysler 300C (2004 - )	<input type="radio"/> Neon (2003 - )	

OK Cancel

#### ATTENTION!

This procedure will change the numerical value in the electronic component that shows the mileage of the car.

Before this procedure, please make sure that you have all the necessary permissions, approvals, and certificates. According to local legislation of your country, you should follow all the established procedures for this service activity, as well as comply with automobile specifications.


In case you have all the necessary authorization, after procedure completion, please do not forget to refer to all performed actions in all required documents: offers, orders for repair, invoices and any other technical, accounting or commercial documents.

Please confirm that you have read and understood this warning and that the subsequent procedure will be done at your request.

I confirm

I refuse

This is the mileage recalibration screen, which opens up after the vehicle is selected, and lets you read the current mileage by clicking the “Get Mileage” button, and write a new value. Once you write in the new value in the corresponding window you need to press the “Set Mileage” button, so that the new value can be stored.

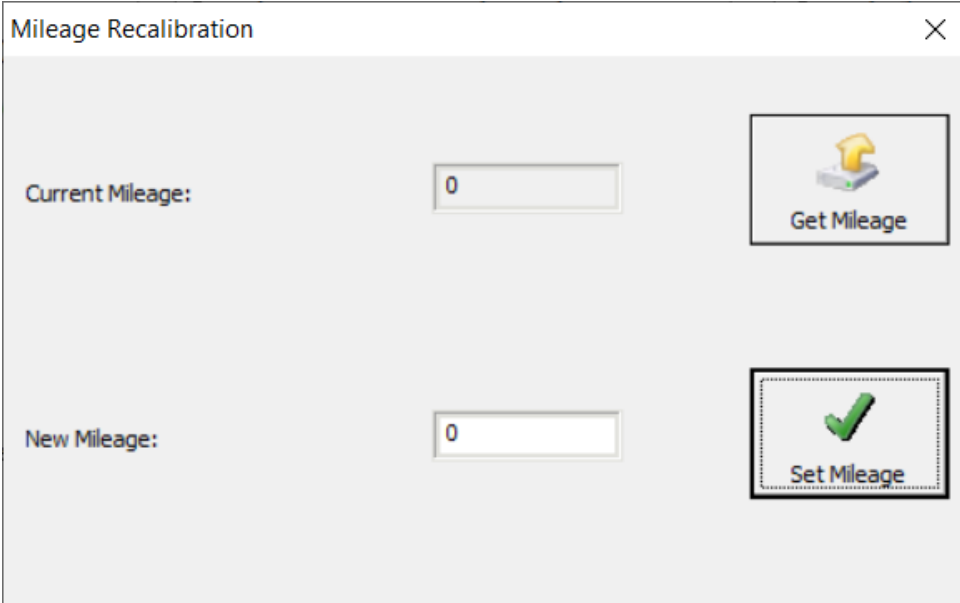


The screenshot displays a software window titled "Mileage Recalibration" with a close button (X) in the top right corner. The window contains two rows of controls:

- The first row is labeled "Current Mileage:" on the left. To its right is a text input field containing the number "0". Further to the right is a button with a yellow upward-pointing arrow icon and the text "Get Mileage".
- The second row is labeled "New Mileage:" on the left. To its right is another text input field containing the number "0". Further to the right is a button with a green checkmark icon and the text "Set Mileage".

## 4. Read/Update ConfData

This special function works via OBDII and lets you read the ConfData of the modules that are listed in a dropdown menu. EEPROM data can be saved to a file, you could also upload a file and write it to a unit.

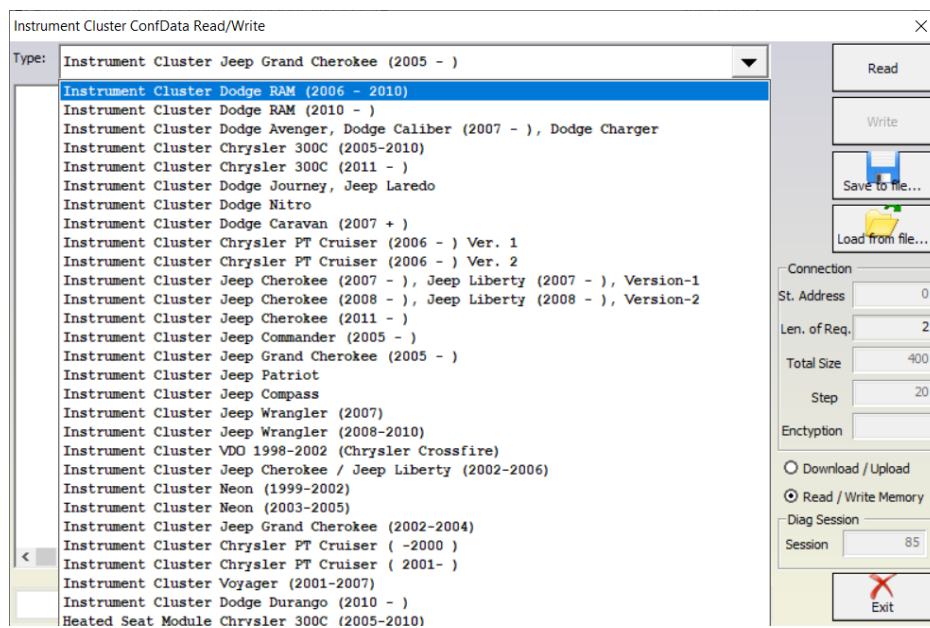


## 5. Dump Tool

The dump tool has the capabilities to

- extract pin code from skim module,
- make immo off to skim module,
- perform cluster calibration
- renew ECU

This application lets you work with modules listed on the next page, and also visible in a dropdown menu. The software can read and update the dump file of the listed modules. You can save the data into a file, and load a file to write into the unit. If data is read/written with a programmer the user must make sure that the proper byte order is used. (two different programmers can produce different dumps) For that purpose a button "Swap bytes" is provided. This buttons changes alternatively the byte order into the dump. So, if after loading the dump file into the dump tool data cannot be extracted or modified, please try to swap the bytes to get a correct result.

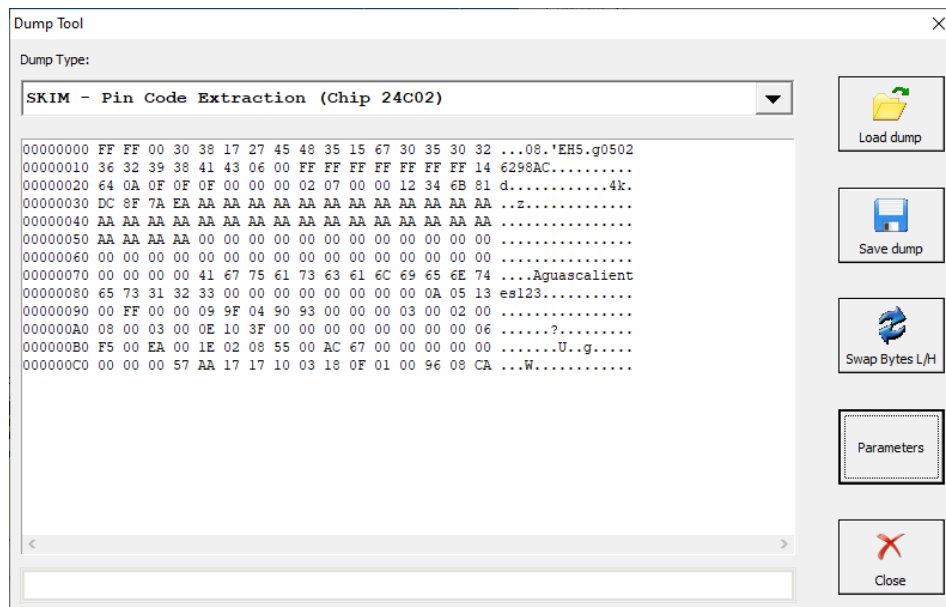

---


Supported models are shown in the dump tool drop down menu, and can be seen in the software while using it. Here is the list:

- SKIM - Pin Code Extraction (Chip HC908AZ32)
- SKIM - Pin Code Extraction (Chip 24C02)
- SKIM - Pin Code Extraction (Chip 95080)
- SKIM - Pin Code Extraction (Motorola L72A)
- SKIM - Immo Off (Chip 24C02)
- Cluster Calibration - Dodge Journey (2010)
- Cluster Calibration - Chrysler 300 (2005-), Dodge Avenger (2007-)
- Cluster Calibration - Chrysler Town And Country (2008-2011)
- Cluster Calibration - Jeep Wrangler (2008) , Chip 93C76
- Cluster Calibration - Neon (- 2002)
- Cluster Calibration - Neon (2003-)
- Cluster Calibration - Jeep Cherokee (2003-)
- Cluster Calibration - Jeep Grand Cherokee (1997-1999)
- Radio Code (Chip 24C16)
- ECU Renew - Bosch XXX XXX 437 (Chip 24C02)
- ECU Renew - DT 2.5 Bosch X XXX XXX. 333
- ECU Renew - Voyager 2.5 ID Bosch X XXX xxx 708



## 6. ECU Flasher Special Function

ECU Flasher special function lets you read the ConfData and Flash files of EDC15c2 and EDC16+ CP31 units and save them to a file. A file can also be uploaded and you can write it to the unit. This function can be used for ECU cloning.

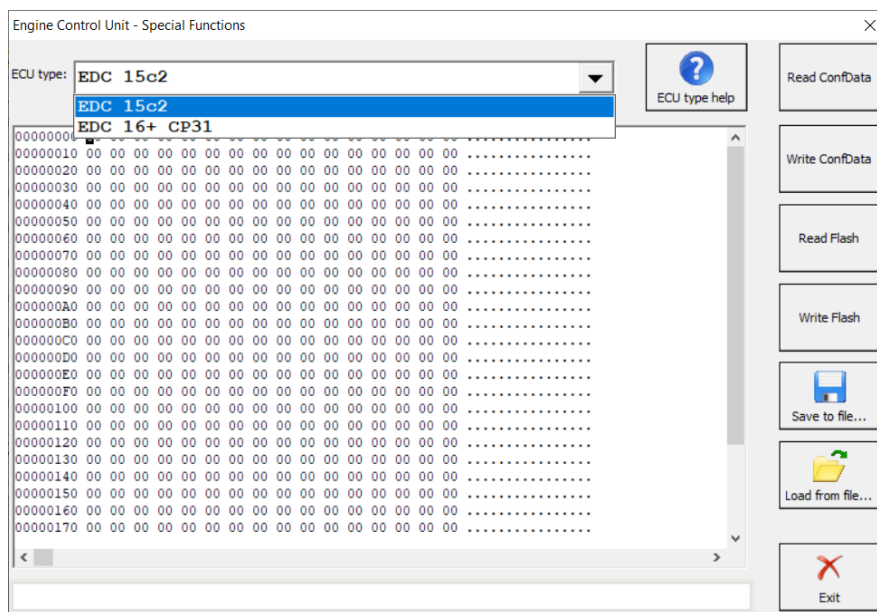

## 7. Key Learning - Immobilizer (SKIM)

---

SKIM is an abbreviation, which stands for Sentry Key Immobilizer System.

In the Chrysler/Dodge/Jeep vehicles, it prevents unauthorized operation of the vehicle by disabling the engine. The system will shut the engine down after 2 seconds of running if an invalid key is used to start the vehicle. This system utilizes ignition keys which have an electronic chip (transponder) embedded into them. Only keys that have been programmed to the vehicle can be used to start and operate the vehicle for more than the two second validation time period.


During normal operation, the Sentry Key Indicator light, located on the instrument panel upper cover, will come on for 3 seconds immediately after the ignition is turned on for a bulb check. Afterwards, if the bulb remains ON solid, this indicates a problem with the electronics. If the bulb begins to flash after the bulb check, it indicates that an invalid key has been used to start the vehicle or there is a communication failure between the transponder and the Sentry Key Immobilizer Module. Both of these lamp conditions will result in the engine being shut down after 2 seconds of running. Keep in mind that a key which has not been programmed is also considered an invalid key even if it is cut to fit the ignition for that vehicle.

If the Sentry Key Immobilizer System indicator light comes on during normal vehicle operation (it has been running for longer than 10 seconds) a fault has been detected in the electronics and the vehicle should be serviced as soon as possible.

The Theft Alarm Light, located on top of the instrument panel, will illuminate for about 3 seconds when the ignition switch is first turned to the ON position. If the vehicle electronics do not receive a valid signal from the ignition key, the theft alarm light will flash continuously to signal that the vehicle has been immobilized. If the Theft Alarm Light remains ON during vehicle operation, it indicates a fault in the system electronics.

A four digit PIN is needed to service the Sentry Key Immobilizer System. This number can be found on your customer invoice that you were given upon purchase of your vehicle. However, if you have lost your PIN Code, the **Abrates Diagnostics for Chrysler/Dodge/Jeep** can read it from the SKIM module

When you select Immobiliser "SKIM" special function a screen that you can see below will appear. At this moment you must select the appropriate vehicle. If you do not know which vehicle to choose you may check the Part Number of the SKIM module and select the vehicle whose Part Number matches. You may also select "AUTODETECT" and the software will try to detect which is the best match.

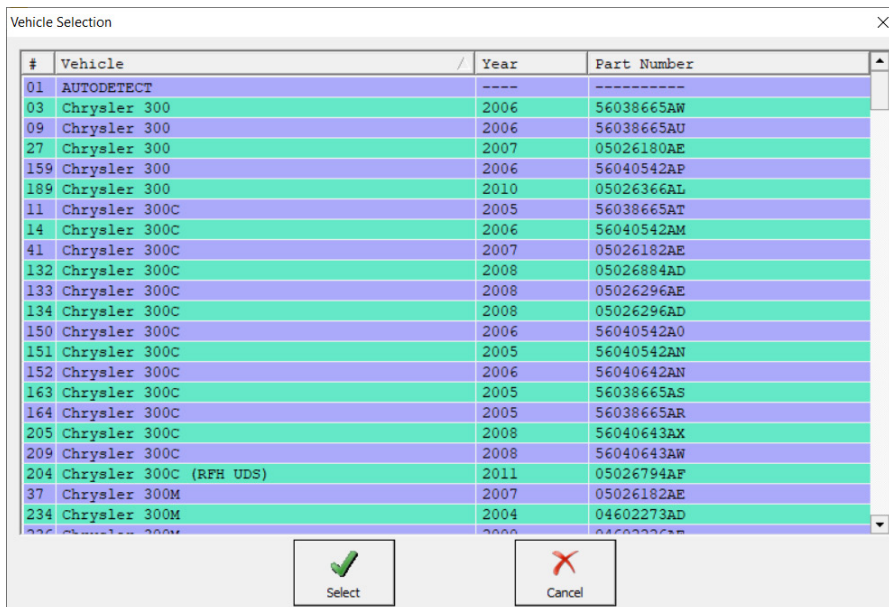


#	Vehicle	Year	Part Number
01	AUTODETECT	----	-----
03	Chrysler 300	2006	56038665AW
09	Chrysler 300	2006	56038665AU
27	Chrysler 300	2007	05026180AE
159	Chrysler 300	2006	56040542AP
189	Chrysler 300	2010	05026366AL
11	Chrysler 300C	2005	56038665AT
14	Chrysler 300C	2006	56040542AM
41	Chrysler 300C	2007	05026182AE
132	Chrysler 300C	2008	05026884AD
133	Chrysler 300C	2008	05026296AE
134	Chrysler 300C	2008	05026296AD
150	Chrysler 300C	2006	56040542A0
151	Chrysler 300C	2005	56040542AN
152	Chrysler 300C	2006	56040642AN
163	Chrysler 300C	2005	56038665AS
164	Chrysler 300C	2005	56038665AR
205	Chrysler 300C	2008	56040643AX
209	Chrysler 300C	2008	56040643AW
204	Chrysler 300C (RFH UDS)	2011	05026794AF
37	Chrysler 300M	2007	05026182AE
234	Chrysler 300M	2004	04602273AD
236	Chrysler 300M	2000	04602273AD

After you are ready with the selection you must press the button 'Select'.

From this menu you have many options to continue, but this is the menu for the key programming. Here you have the option to program or erase a key, to read the PIN Code of the vehicle, to save the data to a file and write it.

**Important:** if you know the PIN Code of the vehicle you can enter it in the field "PIN Code:". After this you can click the buttons "Program a Key" and "Erase Keys". However, if you don't know the PIN Code – you must press the button "Get Values". The software will read the PIN Code from the SKIM module and will display it.

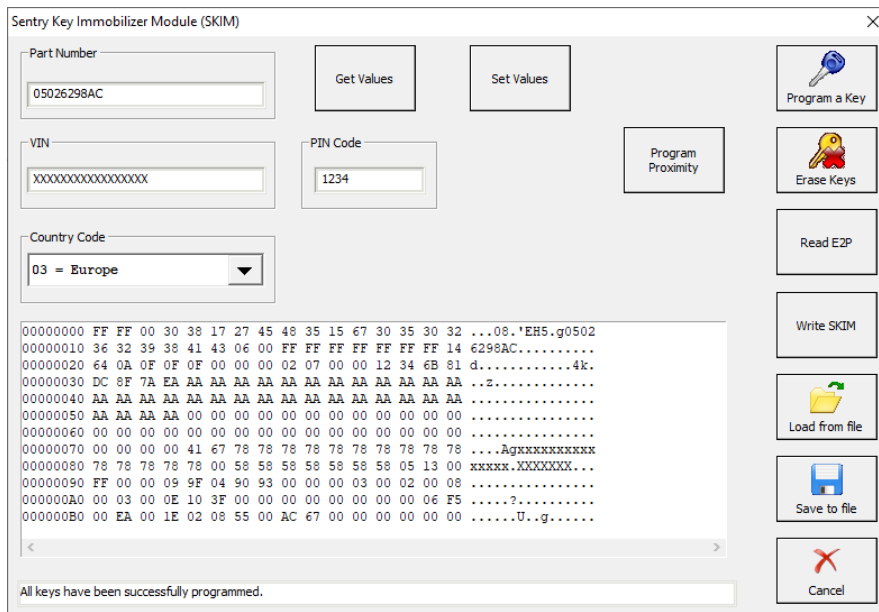

---

## 7.1. Programming Keys

Below is the procedure, which you must follow in order to program new keys. We give an example for programming 2 keys:

1. Press the button "Program Keys".
2. Insert the first valid key into the ignition and turn the ignition ON for at least 3 seconds - but no longer than 15 seconds.  
Turn the ignition OFF and remove the first key.
3. Insert the second valid key and switch the ignition ON within 15 seconds. After ten seconds a chime will sound and the Theft Alarm Light will begin to flash.  
Turn the ignition OFF and remove the second key.
3. Insert a blank Sentry Key into the ignition and switch the ignition ON within 60 seconds. After 10 seconds a single chime will sound. The Theft Alarm Light will stop flashing, and turn ON for 3 seconds; then turn OFF.

The new Sentry Key has been programmed. The Remote Keyless Entry (RKE) transmitter will also be programmed during this procedure.

You can repeat this process to program up to a total of 8 keys.


## 7.2 Erasing Keys

If a programmed key is lost, you need to erase the available keys from the systems memory. This will prevent the lost key from starting the vehicle.

All of the remaining keys must then be reprogrammed.

## 8. Mechanical Key Code Speical Function

Mechanical key Code Special Function provides the locksmith with the Cutting code of the key automatically by entering the Code. Mechanical key code can be obtained from the dealer if not known. The Key Cutting code can be directly used for the cutting locksmith machines to prepare the blade of the key.

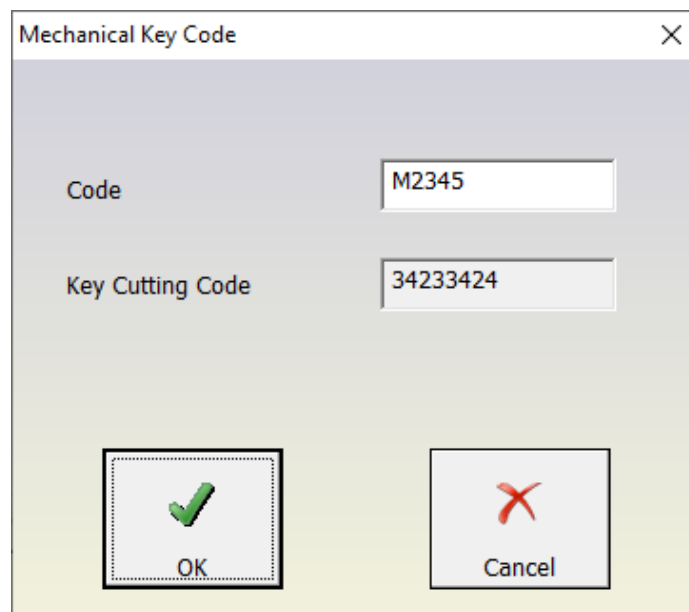


The image shows a software dialog box titled "Mechanical Key Code" with a close button (X) in the top right corner. The dialog box has a light gray background and contains two input fields. The first field is labeled "Code" and contains the text "M2345". The second field is labeled "Key Cutting Code" and contains the text "34233424". At the bottom of the dialog box, there are two buttons: "OK" with a green checkmark icon and "Cancel" with a red X icon.

## 9. Radio Code Special Function

Radio Code special function provides the option for you to get the radio code for a vehicle by entering the serial number of the unit. From the drop-down menu you can select the generation of the vehicle you are working with, and press the "Get Radio Code" button in order to obtain the required information. Here are the supported generations:

- Radio Codes (1995 - 2002)
- Radio Codes ( - 1999)
- Radio Codes (2000 - 2002)
- Radio Codes for L Radios 3.1

See screenshots below:

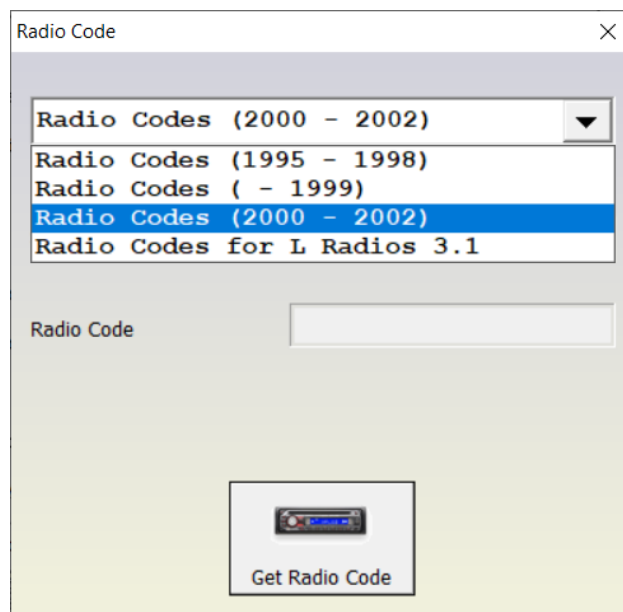

## 10. Appendix

---

### 10.1 Supported models for Calibration:

Calibration in Engine Control Unit:

- SRI-3
- SRI-4
- SRI-5 (2006-2011)
- SRI all versions (2011+)
- PCM - EDC15C2 (2000-2005)

Supported Models:

**Chrysler:** 300C 2004+, 300C (2011+), 300M - Requires J1850 Adapter, Aspen (2007), Crossfire (1999 with VDO dash), Pacifica (2007), PT Cruiser (2002-2006) - Requires J1850 Adapter, PT Cruiser (2006 +), Voyager (-2007) - Requires J1850 Adapter, Voyager 2007+, Town and Country (2007-2010).

**Dodge:** Avenger 2007+, Avenger (2011+), Caravan 2007+, Caliber 2007+, Charger 2007+, Dakota (2004-2006), Durango (2004-2006), Durango 2007+, Durango (2011+), Grand Caravan (2011+), Magnum Neon (1998-2005) - Requires J1850 Adapter, RAM (2001 - 2006)- Requires J1850 Adapter, RAM (2006 - 2012), Nitro, Journey, Journey (2011+).

**Jeep:** Commander 2005+, Grand Cherokee (2002-2004) - Requires J1850 Adapter, Grand Cherokee 2005+, Cherokee (2002-2006) - Requires J1850 Adapter, Cherokee (2007-2011), Cherokee (2011+), Liberty (2007-2010), Patriot (2007-2012), Compass (2007-2009), Wrangler (2007-2012), Laredo (2007-2011).

**Volkswagen:** Routan (2009-2012)

Full description of this diagnostic software, and lists of supported models available at: <https://abrites.com/page/abrites-diagnostics-for-chrysler-dodge-jeep>