



ABRITES RH850/V850 PROGRAMMER



User manual
version 1.2

Important notes

The Abrites software and hardware products are developed, designed and manufactured by Abrites Ltd. During the production process we comply to all safety and quality regulations and standards, aiming at highest production quality. The Abrites hardware and software products are designed to build a coherent ecosystem, which effectively solves a wide range of vehicle-related tasks, such as:

- Diagnostic scanning;
- Key programming;
- Module replacement,
- ECU programming;
- Configuration and coding.

All software and hardware products by Abrites Ltd. are copyrighted. Permission is granted to copy Abrites software files for your own back-up purposes only. Should you wish to copy this manual or parts of it, you are granted permission only in case it is used with Abrites products, has "Abrites Ltd." written on all copies, and is used for actions that comply to respective local law and regulations.

Warranty

You, as a purchaser of Abrites hardware products, are entitled of a two-year warranty. If the hardware product you have purchased has been properly connected, and used according to its respective instructions, it should function correctly. In case the product does not function as expected, you are able to claim warranty within the stated terms. Abrites Ltd. is entitled to require evidence of the defect or malfunction, upon which the decision to repair or substitute the product shall be made.

There are certain conditions, upon which the warranty cannot be applied. The warranty shall not apply to damages and defects caused by natural disaster, misuse, improper use, unusual use, negligence, failure to observe the instructions for use issued by Abrites, modifications of the device, repair works performed by unauthorized persons. For example, when the damage of the hardware has occurred due to incompatible electricity supply, mechanical or water damage, as well as fire, flood or thunder storm, the warranty does not apply.

Each warranty claim is inspected individually by our team and the decision is based upon thorough case consideration.

Read the full hardware warranty terms on our [website](#).

Copyright information

Copyright:

All material herein is Copyrighted © 2005-2023 Abrites, Ltd.
Abrites software, hardware, and firmware are also copyrighted
Users are given permission to copy any part of this manual provided that the copy is used with Abrites products and the “Copyright © Abrites, Ltd.” statement remains on all copies.
“Abrites” is used in this manual as a synonym with “Abrites, Ltd.” and all it’s affiliates
The “Abrites” logo is a registered trademark of Abrites, Ltd.

Notices:

The information contained in this document is subject to change without prior notice. Abrites shall not be held liable for technical/editorial errors, or omissions herein.
Warranties for Abrites products and services are set forth in the express written warranty statements accompanying the product. Nothing herein should be construed as constituting any additional warranty.
Abrites assumes no responsibility for any damage resulting from the use, misuse, or negligent use of the hardware or any software application.

Safety information

The Abrites products are to be used by trained and experienced users in diagnostics and reprogramming of vehicles and equipment. The user is assumed to have a good understanding of vehicle electronic systems, as well as potential hazards while working around vehicles. There are numerous safety situations that cannot be foreseen, thus we recommend that the user read and follow all safety messages in the available manual, on all equipment they use, including vehicle manuals, as well as internal shop documents and operating procedures.

Some important points:

Block all wheels of the vehicle when testing. Be cautious when working around electricity.

Do not ignore the risk of shock from vehicle and building-level voltages.

Do not smoke, or allow sparks/flame near any part of the vehicle fuel system or batteries.

Always work in an adequately ventilated area, vehicle exhaust fumes should be directed towards the exit of the shop.

Do not use this product where fuel, fuel vapours, or other combustibles could ignite.

In case any technical difficulties occur, please contact the
Abrites Support Team by email at support@abrites.com.

Table of contents

1. Introduction
2. General Information
 - 2.1 Requirements
 - 2.2 Supported units
 - 2.3 Additional licenses required for completing the job
 - 2.4 Additional Important Information
 - 2.5 Frequently Asked Questions (FAQ)
3. Hardware
4. Using the software
5. Connection and diagrams
 - 5.1 Connection diagrams

List of revisions

Date	Chapter	Description	Revision
20.04.2023	ALL	Document created.	1.0
29.06.2023	ALL	Many general details added Connection diagrams removed	1.1
11.09.2023	ALL	Revision of all sections; 2.5 added	1.2

1. Introduction

Congratulations on choosing our wonderful product!

Our new Abrites RH850/V850 programmer is a powerful tool that can read RH850 processors and read/write V850 processors, making it a versatile solution for professionals. As a professional, you know the importance of having the right tools to get the job done right.

In this user manual, we'll walk you through the process of connecting both AVDI and RH850/V850 programmer to your PC, using the software and making the right connections to the electronic units you are working on.

ABRITES is a trade mark of Abrites Ltd

2. General Information



2.1 Requirements

Minimum system requirements – Windows 10 or later, USB port with supply 100 mA / 5V +/- 5%

You should use the device only with the supplied cables and adapters - this is crucial for the proper exploitation and function of the programmer. Please do not use external power supply, especially one that exceeds 5V, as this may result to a damage to the programmer.

2.2 Supported units

The supported units for reading (electronic units equipped with RH850/V850 processors) and writing (electronic units equipped with V850 processor) is dynamic and constantly updated, as we are adding more units to the supported list constantly. You are able to check if your dashboard is supported in the software by part number. Once you open the software, on the main screen you will see a button “Check by Part Number”, you can type the part number and you will get the needed information.

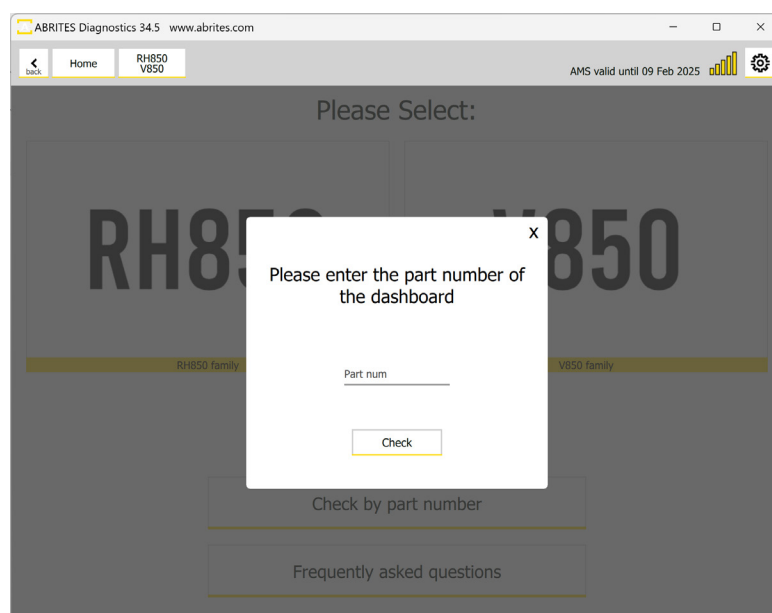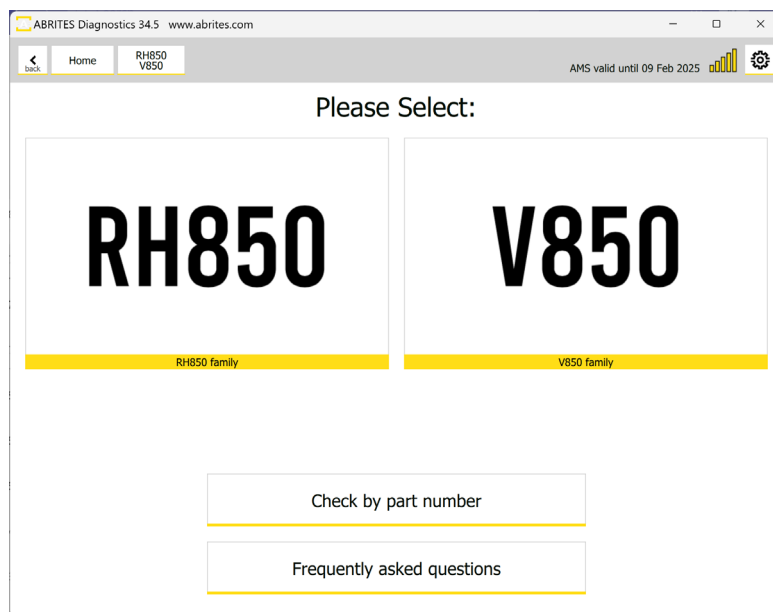

2.3 Additional licenses required for completing the job

- Mileage recalibration procedures for VAG vehicles with V850 processors require the VN007 license.
- Key programming procedures for VAG vehicles with V850 processors require the VN009 license.
- Key programming procedures for VAG vehicles with RH850 processors require the VN021 license.
- All Keys Lost key programming procedures for Renault vehicles equipped with a HFM/BCM module require the RR026 license.
- All Keys Lost key programming procedures for Nissan vehicles equipped with a HFM/BCM module require the NN010 license.
- All Keys Lost key programming procedures for Ford vehicles equipped with a BCM with RH850 processor require FR011 license

2.4 Additional Important Information

It is **very important** to note the following situation for VAG RH850/V850 dashboards:

Please **do not turn any VAG Dashboard ON while it is still disassembled**, and most important, while the fan is not ON. **Only turn the dashboard ON when it is fully assembled**. Otherwise, the dashboard will set a DTC “Control Module Faulty” and there is no way to fix it.



It is very important to keep all the cables and wires in their original state and not put any extensions to any of the wires when soldering.

Reading such an MCU is a very difficult task, that involves some risks for the unit. In some cases the reading might not completely finish, and if you find yourself in such a situation, be aware that it is a safety matter. In such cases do not hesitate to contact the Abrites Support Team for assistance.

2.5 Frequently Asked Questions (FAQ)

On the main screen of the software you will see the 2 types of MCUs - V850 and RH850, as well as 2 buttons - "Check by part number" and "Frequently asked questions"

By pressing the "Frequently asked questions" button you will be able to see answers to important topics that concern many of our customers:

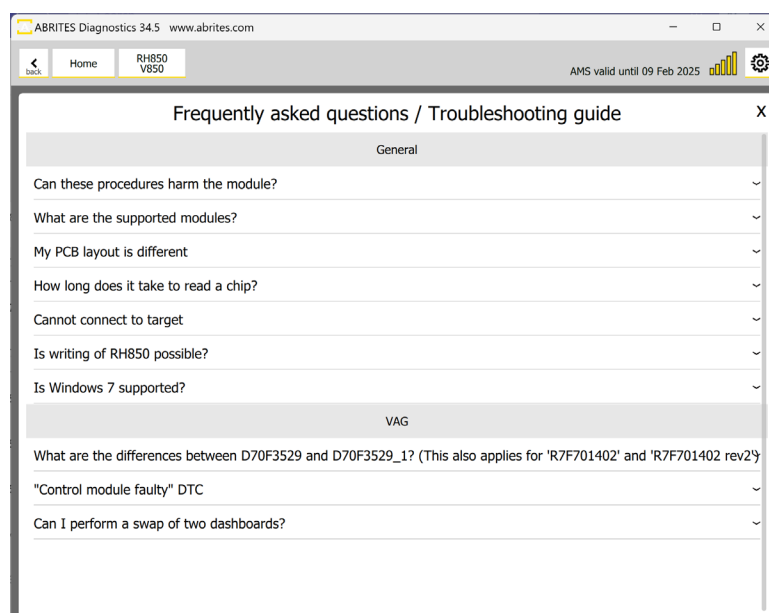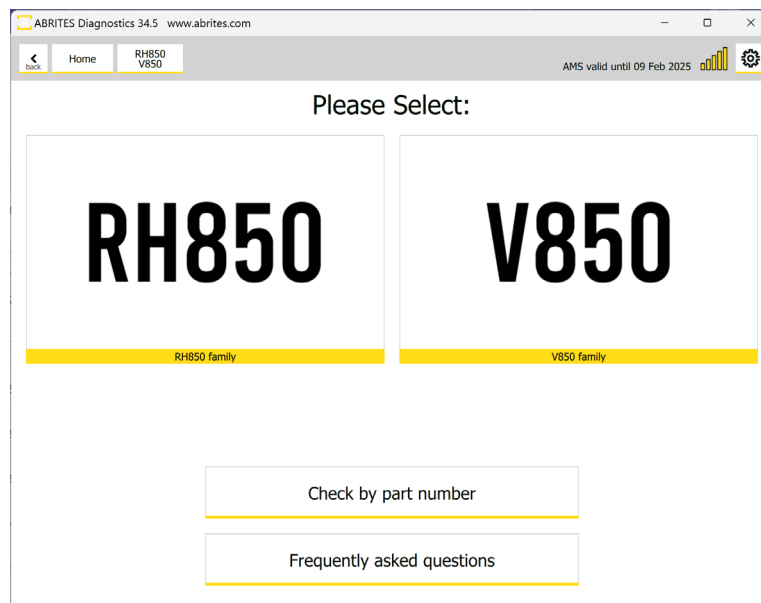

3. Hardware

The set consists of:

- ZN085 Abrites programmer for RH850/V850,
- 5V/1A power adapter,
- USB-C to USB-A cable
- CB501 - RH850/V850 connection cable- intended for establishing a connection with the electronic units by soldering. (CB501 is also sold separately)
- A set of 3.3 Ohm resistors

You should use the device only with the supplied cables and adapters - this is crucial for the proper exploitation and function of the programmer. Please do not use external power supply, especially one that exceeds 5V, as this may result to a damage to the programmer.





N.B: For the optimal performance of the Abrites RH850/V850 programmer we strongly recommend using the USB-C to USB-A and power adapter supplied by Abrites only. We have tested our software thoroughly with this specific cable and adapter and can guarantee its compatibility with our product.



If other cables or adapters are used, there may be unexpected behavior of the software, which could lead to errors. Therefore, we advise against using any other cables or adapters to connect our programmer to your PC.

4. Using the software


After connecting both the Abrites programmer for RH850/V850 and AVDI to the PC via USB ports, launch the Abrites Quick Start Menu, scroll down until you find the “RH850/V850 programmer” and click on it. Once you open the software you will have the option to choose the MCU type you are working with - RH850 or V850. Please select the icon of your choice.

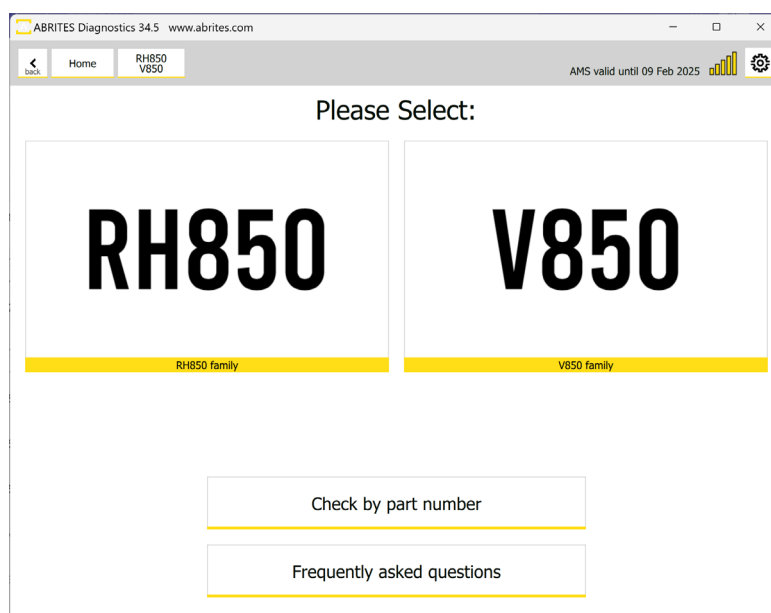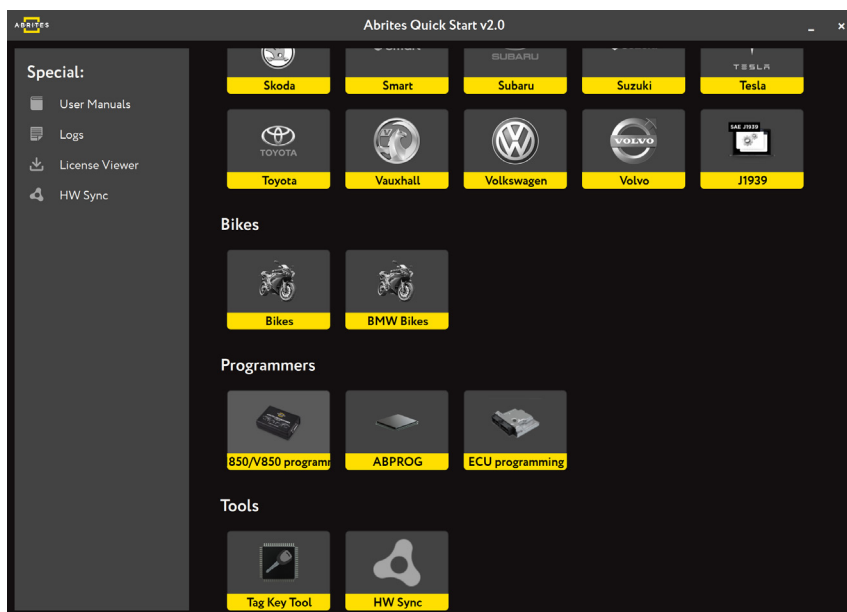



Next screen will show you the available units with the chosen MCU type, and you need to make your selection. In the example below we use Renault HFM. Once the unit is selected, you will see the main screen, which gives you the option to read to see the connection diagram, read the MCU, or load a file.

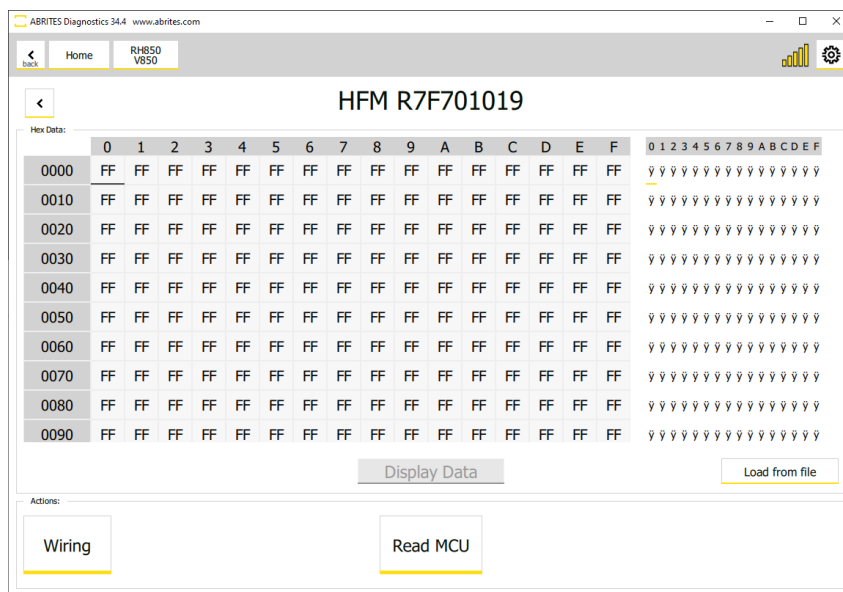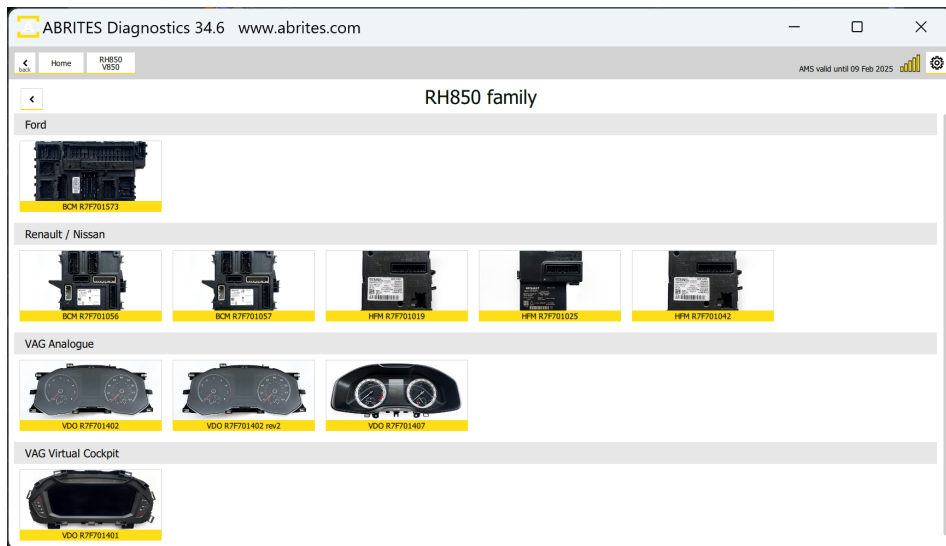

The button “Wiring” will give you everything that is needed for connection to the selected unit.

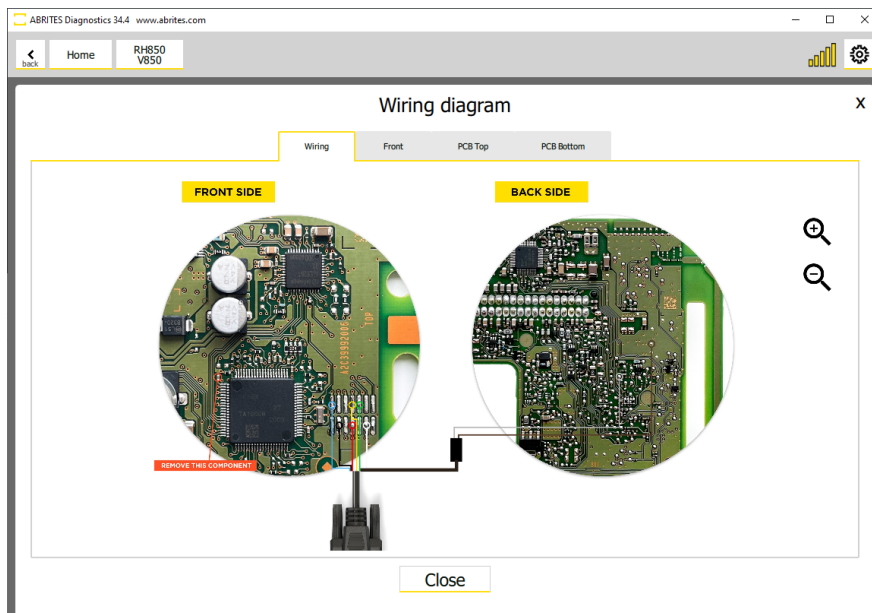

Once ready with the connections you can proceed to reading the unit by pressing the “Read MCU” button. Once the unit is read, the software will display the available information and you will see a screen like the one below (note that in this case we are using Renault HFM; VAG dashboards will display different information)

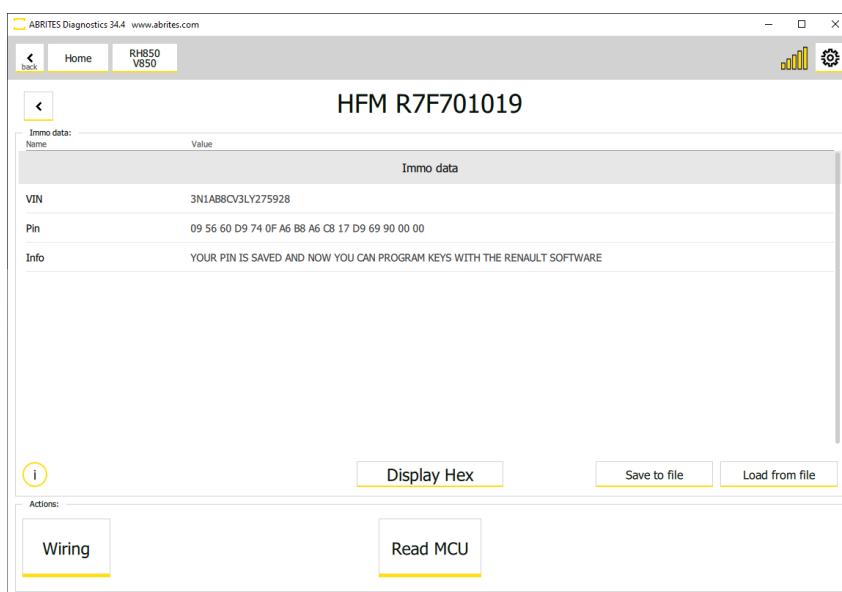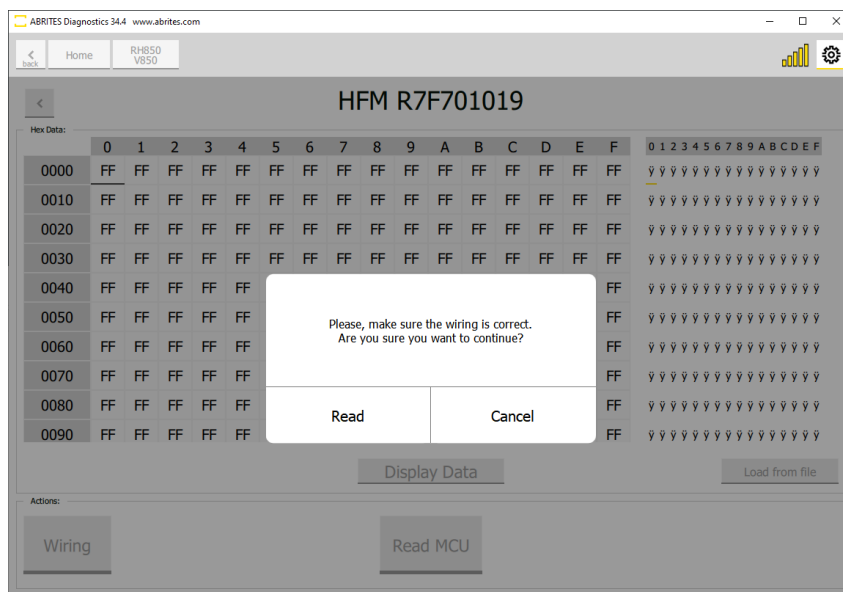

Below you may see example of a VAG dashboard read with the programmer.

The screenshot shows the ABRITES Diagnostics 34.4 software interface. The window title is "ABRITES Diagnostics 34.4 www.abrites.com". The interface is for a VAG dashboard read, specifically for "VDO D70F3526". The top navigation bar includes "Home" and "RH850 V850" tabs, and a status indicator "AMS valid until 16 Feb 2024".

The main content area displays the following data:

Immo data:	
Name	Value
Mileage	
Mileage	488118
Immo data	
CP	AD F9 31 3B AF 6A 2A BE CC 1F 18 F9 6F 85 55 72
CS	CC 24 D4 38 AC 36 B2 07 49 CA AB 84 97 FE EB 32
VIN	WVWZZZ3CZGE163397
Power Class	A3
Config	23
MAC 1	35 50
MAC 2	EA 10

Below the data table, there are three buttons: "Display Hex", "Save to file", and "Load from file".

At the bottom, there is an "Actions:" section with three buttons: "Wiring", "Read MCU", and "Write MCU".

5. Connection and diagrams

When connecting to the unit, it is crucial to adhere strictly to the connection diagrams provided in the software. Additionally, please take note of the following important statements:

1. It is strongly recommended to verify your connections using a multimeter, specifically checking for any short circuits to ground at the connection point of the gray cable.
2. Exercise caution to avoid inadvertently shorting the capacitors when returning them to their original soldering positions.
3. We recommend connecting the devices directly to a laptop whenever possible. If a direct connection is not feasible, then it is advisable to use a powered USB hub. Standard USB hubs may not have the necessary power capacity to support all the required devices (AVDI, Protag, ZN085 programmer), which could lead to program malfunctions and damage to units.

Please ensure that you carefully follow these guidelines to ensure proper and safe operation.

5.1 Connection diagrams

Connection diagram for each supported unit can be found in the software, as mentioned in the previous section of this user manual. In order to access a diagram you should follow the steps below:

- Open the software
- Select the type of MCU - RH850 or V850
- Select the unit you are working with
- Click on the “Wiring” button

This will open a new window where you will be able to see all required details: wiring diagram, front and back side of the unit itself, and both sides of the PCB.

